



**NP General Series Battery**

NP General Series VRLA batteries are designed with AGM (Absorbent Glass Mat) technology, High performance plates and electrolyte to give extra power output for common power backup system. NP series Batteries are the general purpose batteries with 5 years floating design life at 25°C. Meet with IEC, BS, JIS and Eurobat standard.

**Application**

- \*Emergency Power System
- \*Communication equipment
- \*Telecommunication systems
- \*Uninterruptible power supplies
- \*Electric bicycle and wheelchairs, etc.
- \*Power tools
- \*Alarm system
- \*Marine equipment
- \*Fire and Security System

**General Features**

- \*Safety Sealing
- \*Non-spillable construction
- \*High Reliability and Stability
- \*Sealed and Maintenance-free
- \*Safety and Quality certification
- \*Long Life and low self-discharge design

**Specification**




**Construction**

- \*Positive .....Lead dioxide
- \*Electrolyte .....Sulfuric acid
- \*Separator .....Fiber glass
- \*Container .....ABS(UL94-HB), Flammability Resistance of UL94-V2 can be available upon request
- \*Negative .....Lead
- \*Safety Valve .....EPDR
- \*Terminal .....Copper

Battery Model	Nominal Voltage		12V	
	Rated capacity(20 Hour rate)		16Ah	
Dimensions	Length	Width	Height	Total Height
	181mm (7.13 inches)	77mm(3.03 inches)	167mm(6.57 inches)	167mm6.57inches)
Approx Weight	5.0kg(11.03lbs) ±3%			
Capacity 25°C (77°F)	20 hour (0.8A,10.8V)	10 hour (1.47A,10.5V)	5 Hour ( 2.7A,10.2V)	1 Hour (0.96A,9.6V)
	16Ah	14.7Ah	13.6Ah	9.6Ah
Max.discharge current	160A (5 Sec.)			
Internal Resistance	Full charged at 25 °C: Approx :16mΩ			
Capacity affected by Temp. (20 HR)	40°C (104 °F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%
Self Discharge at 25°C (77°F)	After 3 months storage		After 6 months storage	After 12 months storage
	91%		82%	64%
Charge method 25°C (77°F)	Cycle Use		Float Use	
	14.40-14.70V (Initial charging current less than 6.4A)		13.50-13.80V	

**Outer dimensions (mm)**

**Terminal Type (mm)**

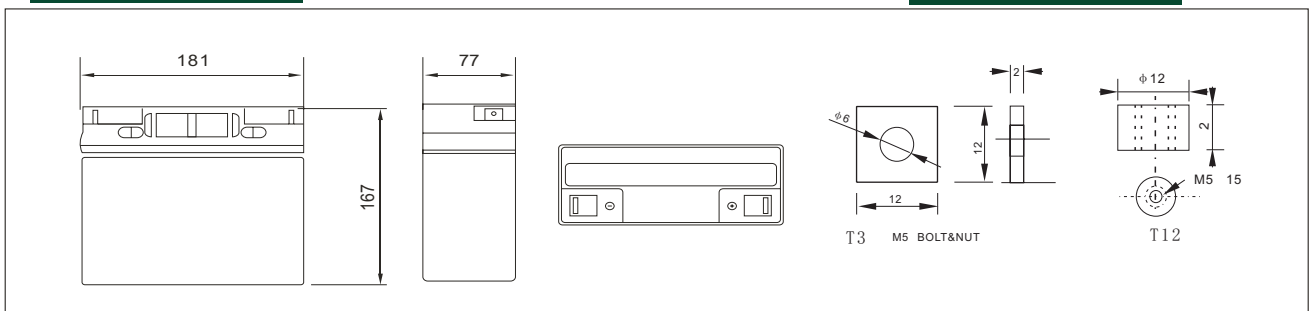


**Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C (77°F)**


Time		5min	10min	15min	30min	1hr	2hr	3hr	4hr	5hr	8hr	10hr	20hr
9.60V	A	57.60	37.80	28.00	18.40	9.60	5.60	4.12	3.31	2.81	1.85	1.51	0.83
	W	598.00	405.00	300.00	198.00	104.00	61.50	45.90	37.20	31.90	21.30	17.50	9.60
10.20V	A	52.80	36.10	25.70	17.50	9.00	5.37	4.00	3.20	2.75	1.82	1.49	0.81
	W	567.00	404.00	288.00	196.00	102.00	61.90	46.30	37.20	32.10	21.30	17.50	9.50
10.50V	A	48.10	33.80	24.00	16.90	8.70	5.27	3.93	3.04	2.74	1.80	1.47	0.80
	W	528.00	384.00	274.00	195.00	101.00	61.10	45.80	35.60	31.90	21.20	17.40	9.50
10.80V	A	46.20	32.30	22.40	16.50	8.40	5.13	3.87	2.99	2.60	1.75	1.43	0.78
	W	518.00	372.00	258.00	191.00	98.00	60.10	45.60	35.30	30.70	20.80	17.10	9.30
11.10V	A	42.70	30.40	20.80	16.00	8.10	5.00	3.67	2.93	2.49	1.71	1.40	0.76
	W	485.00	352.00	242.00	187.00	95.00	59.10	43.50	34.90	29.70	20.50	16.90	9.20




**Discharge characteristic Curve**

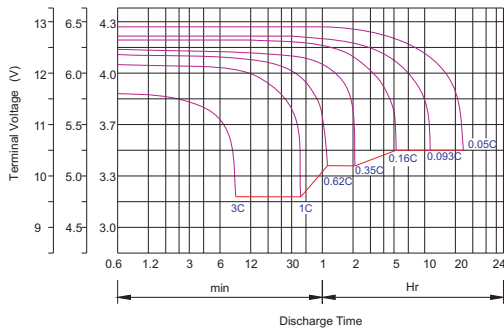


**Cycle service life in relation to depth of discharge**

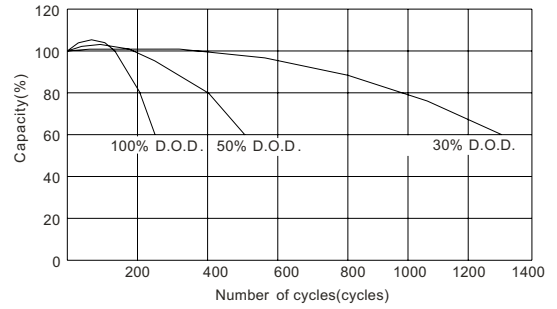


**Relationship between charging voltage and temperature**

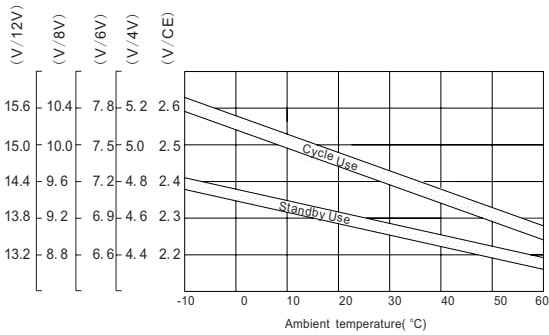


**Constant voltage charging characteristic (0.25CA, at 25°C)**

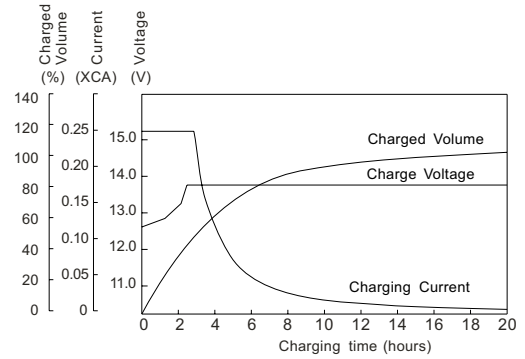


**Life characteristics of standby use**

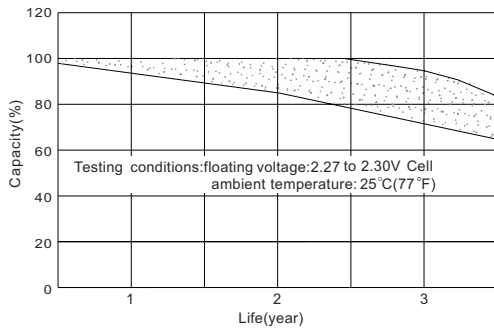

**Self-discharge characteristic**

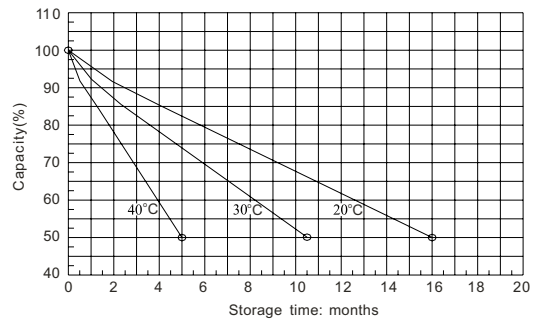

**Temperature effects on float life**

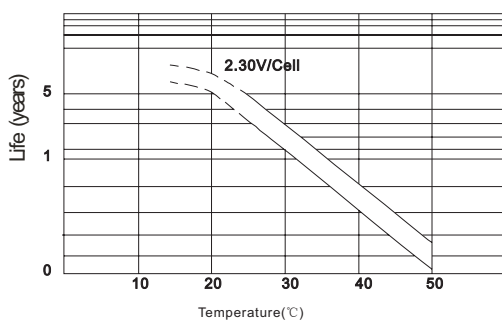

**Charge characteristic Curve for standby use**

