



● NPL General Series Battery

NPL General Series VRLA batteries are designed with AGM (Absorbent Glass Mat) technology, High performance plates and electrolyte to give extra power output for common power backup system. NPL series Batteries are the general purpose batteries with 18 years floating design life at 25°C. Meet with IEC, BS, JIS and Eurobat standard.

● Application

- *Emergency Power System
- *Communication equipment
- *Telecommunication systems
- *Uninterruptible power supplies
- *Solar power and wind power systems, etc.
- *Power tools
- *Power station
- *Marine equipment
- *Fire and Security System

● General Features

- *Safety Sealing
- *Non-spillable construction
- *High Reliability and Stability
- *Sealed and Maintenance-free
- *Safety and Quality certification
- *Long Life and low self-discharge design

● Specification




● Construction

- *PositiveLead dioxide
- *ElectrolyteSulfuric acid
- *SeparatorFiber glass
- *ContainerABS(UL94-HB), Flammability Resistance of UL94-V2 can be available upon request
- *NegativeLead
- *Safety ValveEPDR
- *TerminalCopper

| | | | | |
|------------------------------------|--|--------------------------|-------------------------|--------------------------|
| Battery Model | Nominal Voltage | | 2V | |
| | Rated capacity(10 Hour rate) | | 2000Ah | |
| Dimensions | Length | Width | Height | Total Height |
| | 491mm (19.33 inches) | 351mm(13.82 inches) | 345mm(13.58 inches) | 383mm (15.08 inches) |
| Approx Weight | 132.0kg(291.0lbs) ±3% | | | |
| Capacity 25°C (77°F) | 10 Hour rate (200A,1.8V) | 5 Hour rate (320A,1.75V) | 5 Hour rate (500A,1.7V) | 1 Hour rate (1200A,1.6V) |
| | 2000Ah | 1600Ah | 1500Ah | 1200Ah |
| Max.discharge current | 4000A(5Sec.) | | | |
| Internal Resistance | Full charged at 25 °C (77°F): Approx 0.13mΩ | | | |
| Capacity affected by Temp. (10 HR) | 40°C (104 °F) | 25°C (77°F) | 0°C (32°F) | -15°C (5°F) |
| | 102% | 100% | 85% | 65% |
| Self Discharge at 25°C (77°F) | After 3 months storage | | After 6 months storage | After 12 months storage |
| | 91% | | 82% | 64% |
| Charge method 25°C (77°F) | Cycle Use | | Float Use | |
| | 2.35-2.40V (Initial charging current less than 800A) | | 2.25-2.30V | |

● Outer dimensions (mm)

● Terminal Type (mm)

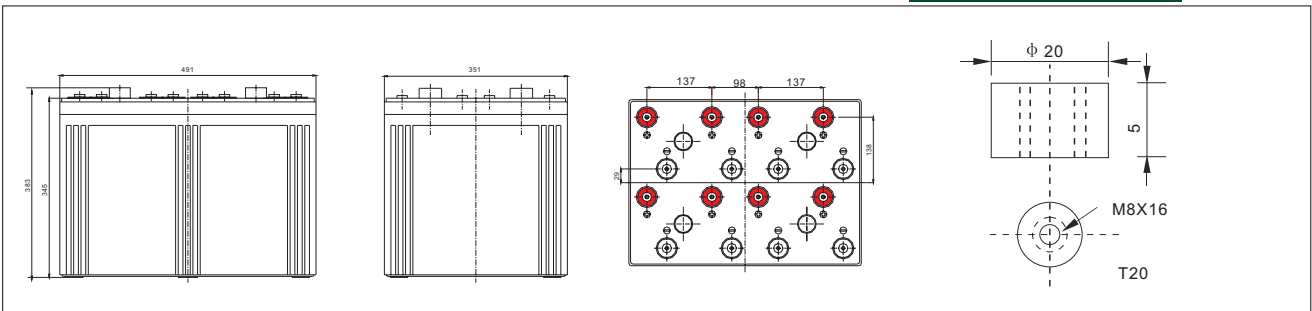


Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C(77°F)


| Time | | 5min | 10min | 15min | 30min | 1hr | 2hr | 3hr | 4hr | 5hr | 8hr | 10hr | 20hr |
|-------|---|-------|-------|-------|-------|--------|--------|-------|-------|-------|-------|-------|-------|
| 1.60V | A | 6406 | 4220 | 3402 | 2280 | 1200.0 | 700.0 | 514.0 | 400.0 | 330.0 | 234.0 | 210.0 | 113.4 |
| | W | 11018 | 7512 | 6079 | 4086 | 2160.0 | 1281.0 | 953.5 | 750.0 | 625.4 | 446.9 | 404.3 | 219.8 |
| 1.70V | A | 6204 | 3808 | 3204 | 2180 | 1128.0 | 668.0 | 500.0 | 390.0 | 324.0 | 228.0 | 206.0 | 110.0 |
| | W | 11043 | 7087 | 5975 | 4079 | 2126.3 | 1283.2 | 965.0 | 755.8 | 629.5 | 444.6 | 403.3 | 215.1 |
| 1.75V | A | 6002 | 3406 | 2802 | 2040 | 1092.0 | 652.0 | 488.0 | 384.0 | 320.0 | 226.0 | 202.0 | 110.0 |
| | W | 10924 | 6458 | 5329 | 3913 | 2107.6 | 1260.3 | 947.7 | 748.8 | 625.3 | 443.0 | 398.3 | 216.7 |
| 1.80V | A | 5784 | 3210 | 2604 | 1880 | 1056.0 | 636.0 | 476.0 | 378.0 | 312.0 | 220.0 | 200.0 | 108.0 |
| | W | 10816 | 6170 | 5000 | 3630 | 2048.6 | 1241.5 | 935.3 | 743.9 | 614.6 | 434.5 | 396.2 | 214.4 |
| 1.85V | A | 5590 | 3008 | 2404 | 1680 | 1020.0 | 620.0 | 460.0 | 368.0 | 304.0 | 214.0 | 190.0 | 102.0 |
| | W | 10565 | 5805 | 4664 | 3276 | 1999.2 | 1221.4 | 910.8 | 730.5 | 604.7 | 427.1 | 382.3 | 206.0 |




Discharge characteristic Curve

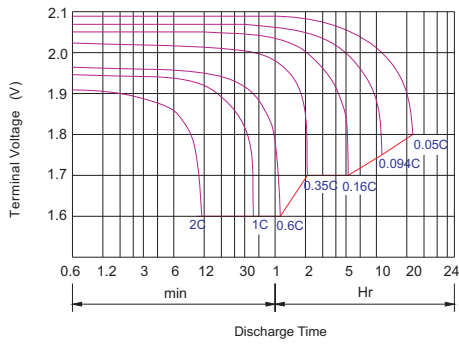


Cycle service life in relation to depth of discharge

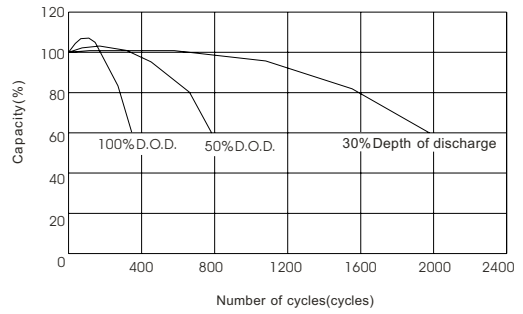


Relationship between charging voltage and temperature

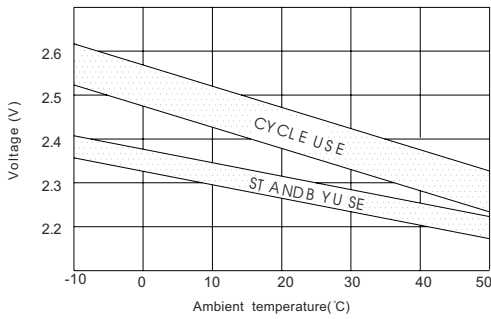


Constant voltage charging characteristic (0.25CA, at 25 °C)

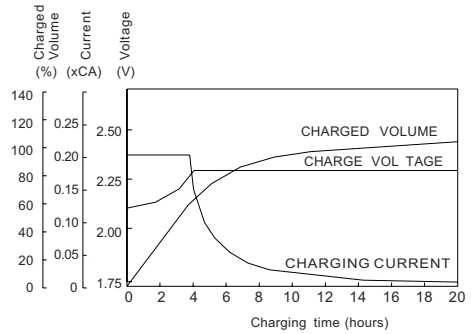


Life characteristics of standby use

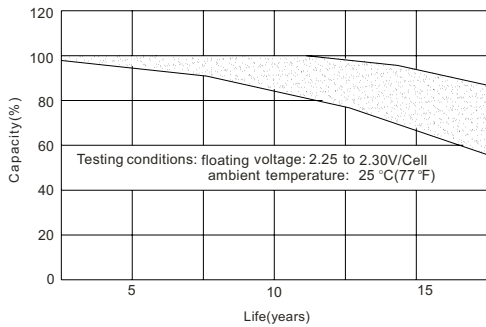

Self-discharge characteristic

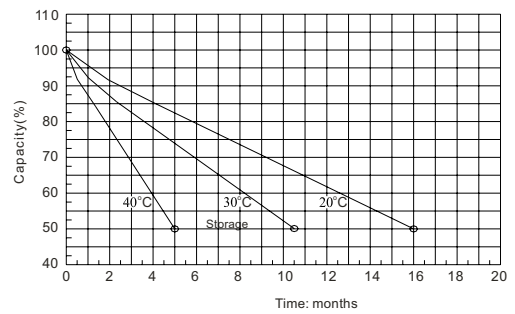

Temperature effects on float life

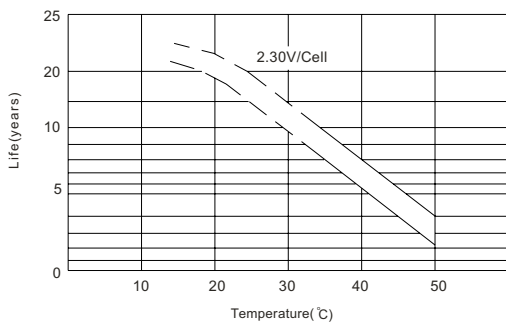

Charge characteristic Curve for standby use

