



● NPM General Series Battery

NPM General Series VRLA batteries are designed with AGM (Absorbent Glass Mat) technology, High performance plates and electrolyte to give extra power output for common power backup system. NPM series Batteries are the general purpose batteries with 10 years floating design life at 25 °C. Meet with IEC, BS, JIS and Eurobat standard .



● Application

- *Emergency Power System
- *Communication equipment
- *Telecommunication systems
- *Uninterruptible power supplies
- *Electric bicycle and wheelchairs, etc.
- *Power tools
- *Alarm system
- *Marine equipment
- *Fire and Security System

● General Features

- *Safety Sealing
- *Non-spillable construction
- *High Reliability and Stability
- *Sealed and Maintenance-free
- *Safety and Quality certification
- *Long Life and low self-discharge design

● Construction


- *PositiveLead dioxide
- *ElectrolyteSulfuric acid
- *SeparatorFiber glass
- *ContainerABS(UL94-HB), Flammability Resistance of UL94-V2 can be available upon request
- *NegativeLead
- *Safety ValveEPDR
- *TerminalCopper

● Specification

Battery Model	Nominal Voltage		12V	
	Rated capacity(20 Hour rate)		35Ah	
Dimensions	Length	Width	Height	Total Height
	196mm (7.72 inches)	131mm(5.16 inches)	155mm(6.10 inches)	180mm(7.09 inches)
Approx Weight	10.2kg(22.49lbs) ±3%			
Capacity 25°C (77°F)	20 hour (1.75A,10.8V)	10 Hour (3.3A,10.5V)	5 Hour (5.3A,10.2V)	1 Hour (19A,9.6V)
	35Ah	33Ah	26.5Ah	19Ah
Max. discharge current	350A(5Sec.)			
Internal Resistance	Full charged at 25 °C: Approx 9.2mΩ			
Capacity affected by Temp. (10 HR)	40°C (104 °F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%
Self Discharge at 25°C (77°F)	After 3 months storage		After 6 months storage	After 12 months storage
	91%		82%	64%
Charge method 25°C (77°F)	Cycle Use		Float Use	
	14.10-14.40V (Initial charging current less than 12.88A)		13.50-13.80V	

● Outer dimensions (mm)

Terminal Type (mm)

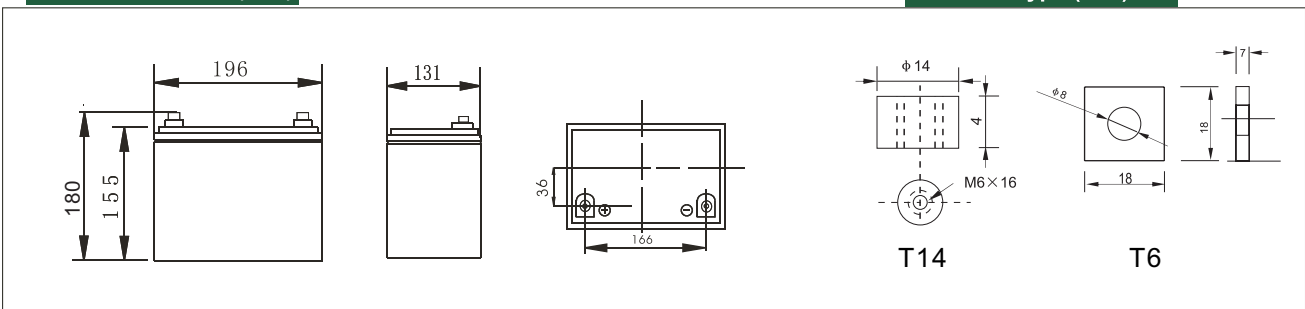

Constant Current (Amp) and Constant Power (Watt) Discharge Table at 25°C (77°F)

Time		5min	10min	15min	30min	1hr	2hr	3hr	4hr	5hr	8hr	10hr	20hr
9. 60V	A	104.0	68.0	55.0	37.0	19.0	11.0	8.3	6.5	5.4	3.8	3.4	1.8
	W	1071.0	730.0	591.0	397.8	210.0	125.0	92.7	72.9	60.8	43.5	39.3	21.4
10. 20V	A	101.0	62.0	52.0	35.0	18.0	11.0	8.1	6.3	5.3	4.0	3.3	1.8
	W	1073.0	689.0	581.0	396.0	207.0	125.0	93.8	73.5	61.2	43.2	39.2	20.9
10. 50V	A	97.0	55.0	45.0	33.0	18.0	11.0	7.9	6.2	5.2	3.7	3.3	1.8
	W	1062.0	628.0	518.0	380.0	205.0	123.0	92.1	72.8	60.8	43.1	38.7	21.1
10. 80V	A	94.0	52.0	42.0	30.0	17.0	10.0	7.7	6.1	5.1	3.6	3.2	1.8
	W	1051.0	600.0	486.0	353.0	199.0	121.0	90.9	72.3	59.7	42.2	38.5	20.8
11. 10V	A	91.0	49.0	39.0	27.0	17.0	10.0	7.5	6.0	4.9	3.5	3.1	1.7
	W	1027.0	564.0	453.0	318.0	194.0	119.0	88.5	71.0	58.7	41.5	37.2	20.0

